



**PULL-SIDE DOOR PREPARATION**

(RHR SHOWN)

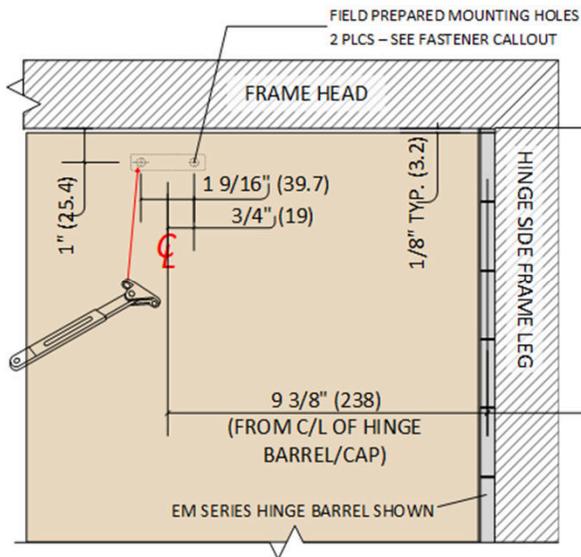

**ADJACENT WALL PREPARATION**

(RHR SHOWN)

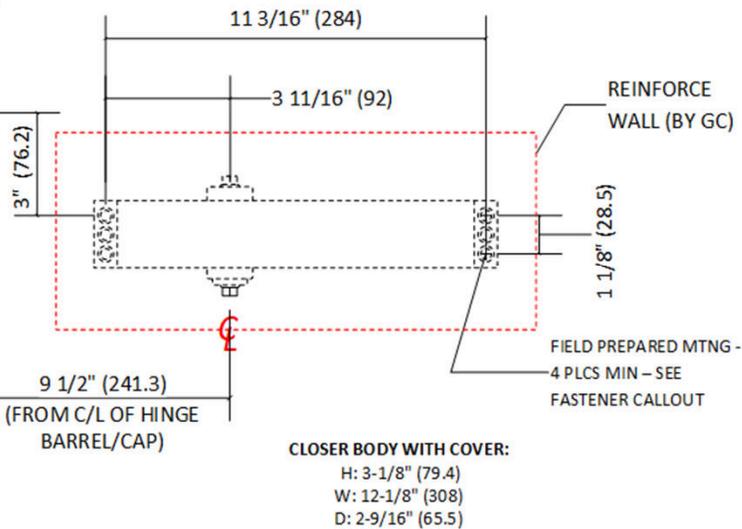


This template supports standard Syntégra EMA/EM Hinges, and **4-½" butt hinges only!** Contact factory for other hinge types.

**FASTENERS:**

CLOSER BODY: # 14 X 3" ALL PURPOSE SCREW – 4 PIECES  
ARM BRACKET - # 14 X 1-¼" ALL PURPOSE SCREW – 2 PIECES

**WALL REINFORCEMENT:**

A minimum of 14ga thick steel, or ¾" wood, and secured to wall studs. The reinforcement may be flush with the wall surface or on the interior behind the drywall layer(s). For masonry construction, the reinforcement may be secured to the wall with four screws (at corners) to metal anchors.

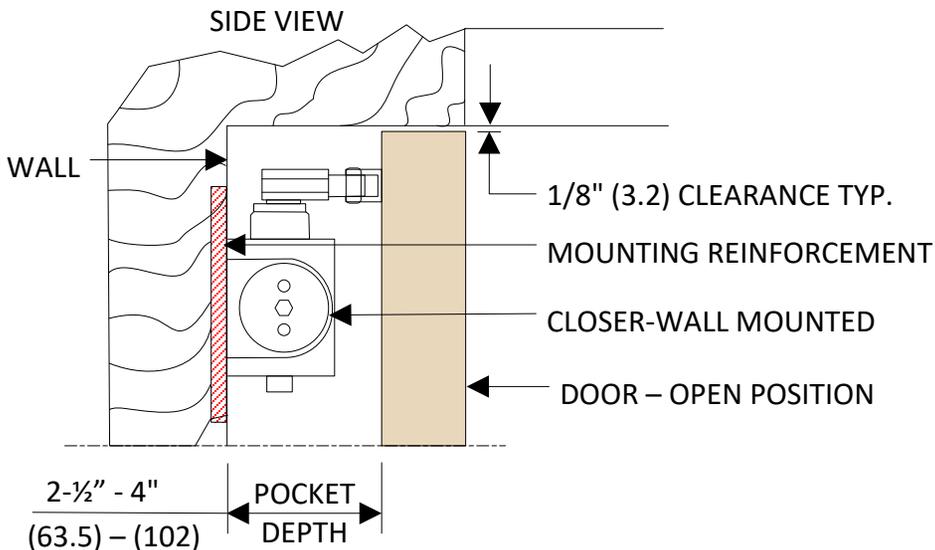

<p>THIS DRAWING REMAINS THE PROPERTY OF SYNTÉGRA LLC. IT MUST BE KEPT CONFIDENTIAL AND EMPLOYED ONLY FOR THE PURPOSE FOR WHICH IT WAS ISSUED. UNAUTHORIZED USE, REPRODUCTION, DISCLOSURE OR RETENTION IS EXPRESSLY PROHIBITED. ALL PROPRIETARY AND MANUFACTURING RIGHTS RESERVED.</p>		 <p>integrated doors by design</p>	
DESIGN HISTORY	DATE	<p><b>CLPKT Pocket Closer</b> <b>180° Applications</b></p>	
DRAWN BY Alan Uyeda	01/12/2023	SIZE <b>B</b>	REV <b>E</b>
PROJECT ENGINEER		DWG. NO. <b>T3010</b>	
SCALE	NTS	DO NOT SCALE DRAWING	SHEET 1 OF 1