

Door Closers – CLPKT Series Pocket Closer

The CLPKT Series (Dorma 8900 Series) is the preferred closer for hold-open pocketed applications. Used in combination with Syntégra’s DH Series wall mounted magnets, the CLPKT Series disappears from view when the doors are held open in the wall pocket. Certified to 10 million cycles, the CLPKT closer represents the latest in door control technology. Syntégra proudly supplies custom-configured Dorma closers with their integrated door systems.

Features/Options


- 90° and 180° swing models available
- 10 million cycles – Third-party verified
- Forged steel main arm hub
- Corrosion-resistant, high-strength, aluminum housing
- Finish – 689 Aluminum standard, contact factory for options
- Non-handed
- Spring force and sweep/ latching valves accessible after installation
- Cushioned stop position adjustable between 80°-130°



Certifications

- ANSI/BHMA A156.4 Grade 1 certified
- Meets UL10C – U.L. and C.U.L. listed
- CSFM approved
- Meets ANSI/BHMA A117.1 and ADA for barrier-free access

CLPKT90 – 90° Pocket Closer (Double-Lever)

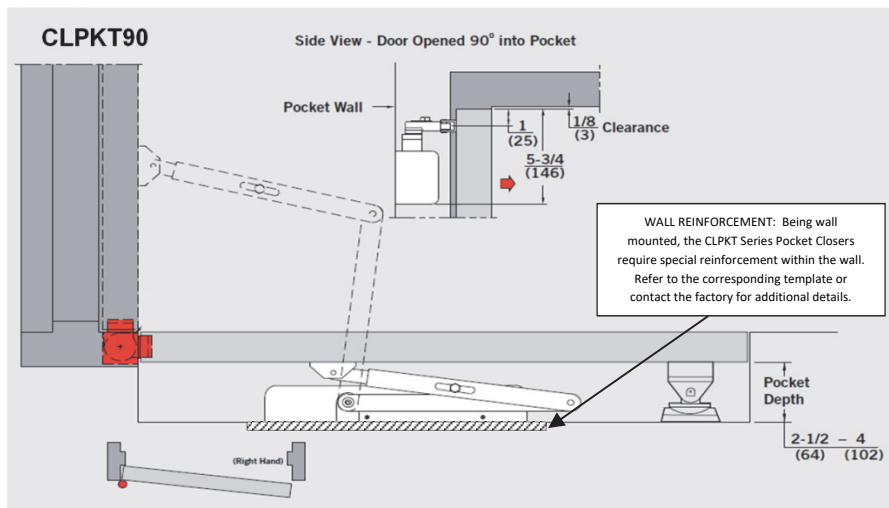


	Door Width					
	2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"
	Min	Max	Max	Max	Max	Max
Interior	•	•	•	•	•	N/A

Maximum Opening	90°
Approx. Backcheck	80°-90°
Min. Door Width	24"


CLPKT180 – 180° Pocket Closer (Double-Lever)

CLPKT180

Continuous hinges create the optimum hanging method for steel doors. The CLPKT Closers coordinate well with either Syntégra's Edge Mount (EM Series) or Swing-Clear (SC Series) hinges.

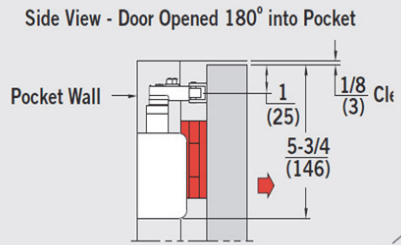

WALL REINFORCEMENT: Being wall mounted, the CLPKT Series Pocket Closers require special reinforcement within the wall. Refer to the corresponding template or contact the factory for additional details.

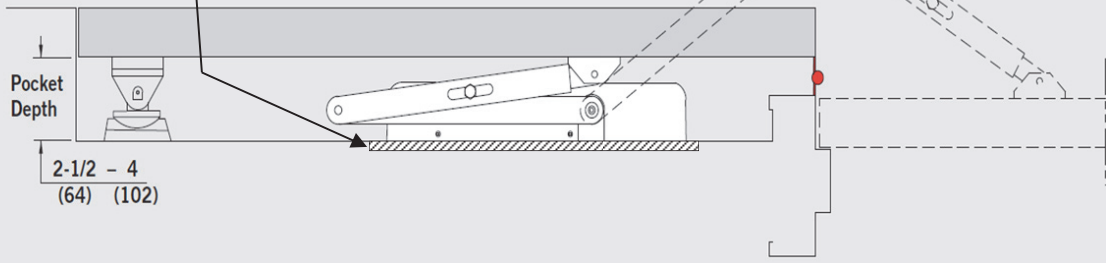

	Door Width					
	2'-0" Min	2'-6" Max	3'-0" Max	3'-6" Max	4'-0" Max	4'-6" Max
Interior	•	•	•	•	•	N/A

Maximum Opening	180°
Approx. Backcheck	120°-180°
Min. Door Width	24"