

# Door Closers – CLPKT Series Pocket Closer

The CLPKT is the preferred closer for hold-open applications. Used in combination with Syntégra’s EDH Series hold open magnets, the CLPKT is the ultimate ‘concealed’ closer as it disappears from view with the doors in the hold-open position. ANSI/BHMA Grade 1 certified to exceed 2 million cycles, the CLPKT build quality allows us to offer an industry-leading lifetime warranty.

## Features/Options


- Universal for 90° and 180° swing applications – non-handed
- Size 1-6 Adjustable Spring force
- Forged steel main arm hub
- Corrosion-resistant, high-strength, aluminum housing
- Standard Finishes – 689 Aluminum, 695 Dark Bronze, 693 Black
  - Architectural Plated finishes available
- Spring force and sweep/latching valves accessible after installation



## Certifications

- ANSI/BHMA A156.4 Grade 1 Certified
- Meets UL10C – U.L. and C.U.L. Listed
- Meets ANSI/BHMA A117.1 and ADA for barrier-free access

## CLPKT – 90° Application

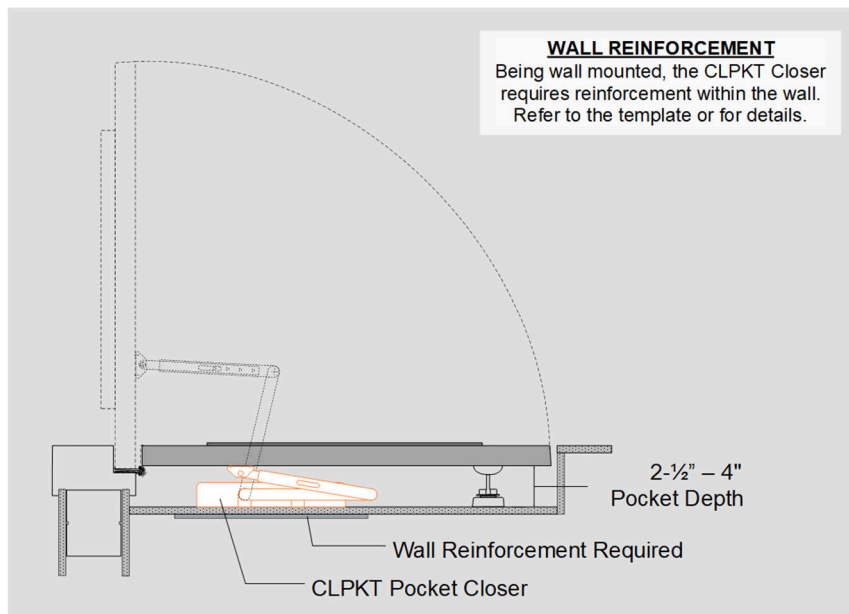


	Door Width				
	16" Min	2'-6" Max	3'-0" Max	3'-6" Max	4'-3" Max
Interior	•	•	•	•	•

Maximum Opening	90°
Approx. Backcheck	80°-90°
Min. Door Width	16"
Max. Door Width	51"
Max. Door Weight	260 lbs. *

\* For doors in excess of 260 lbs., or in applications with significant stack effect pressures, see CLPKTHD-90 or CLPKTHD-180

# CLPKT – 180° Application

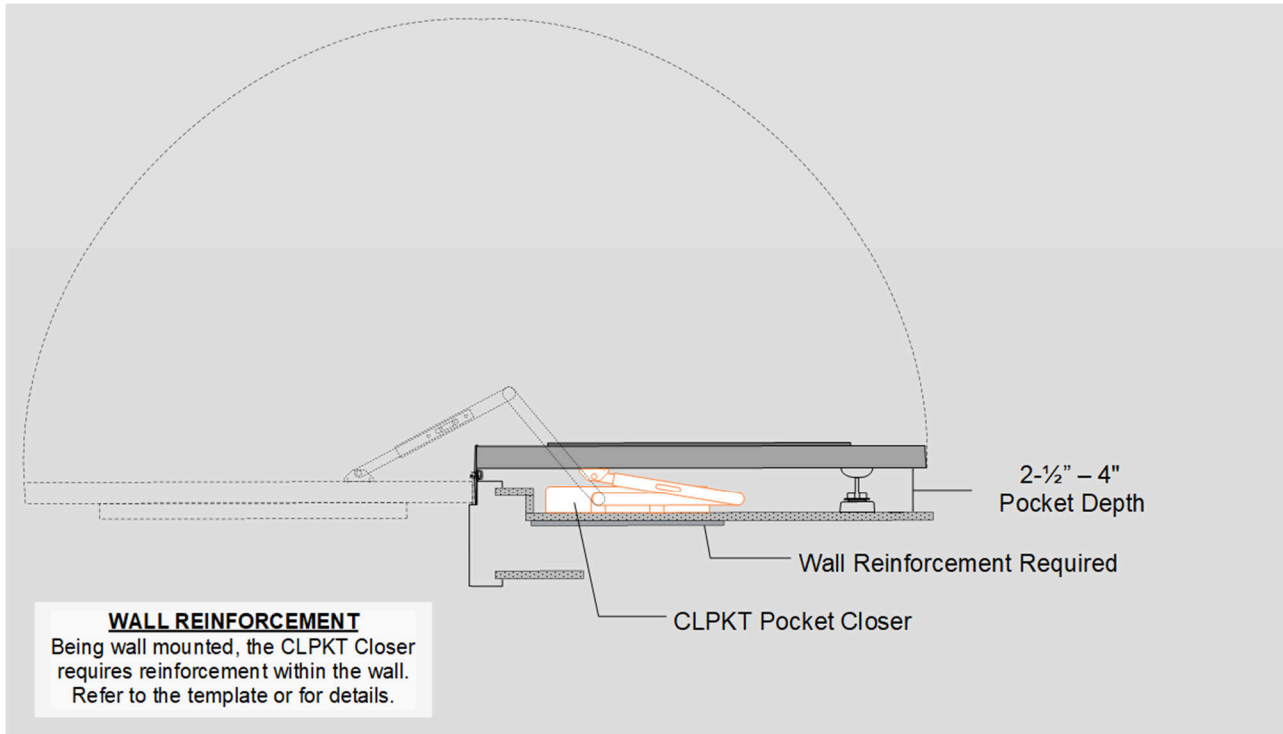

	Door Width				
	16" Min	2'-6" Max	3'-0" Max	3'-6" Max	4'-3" Max
Interior	•	•	•	•	•

Maximum Opening	180°
Approx. Backcheck	120°-180°
Min. Door Width	16"
Max. Door Width	51"
Max. Door Weight	260 lbs. *

\* For doors in excess of 260 lbs., or in applications with significant stack effect pressures, see CLPKTHD-90 or CLPKTHD-180