



## PULL-SIDE DOOR PREPARATION (RHR SHOWN)

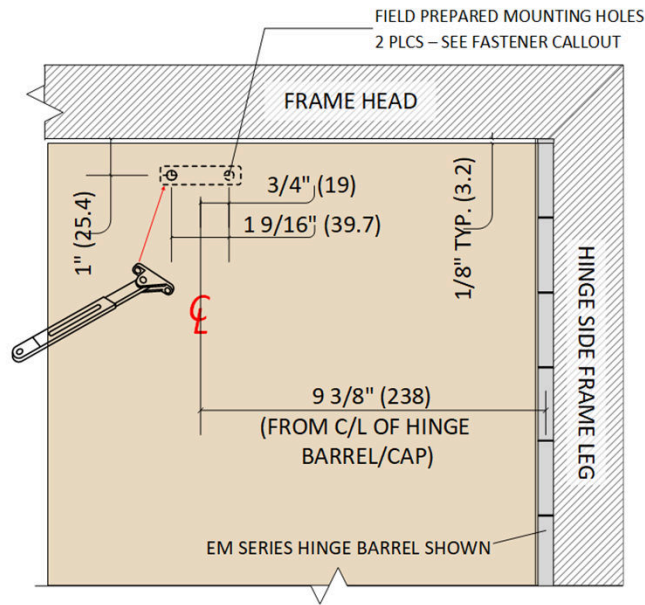

## ADJACENT WALL PREPARATION (RHR SHOWN)

**90°  
APPLICATIONS**

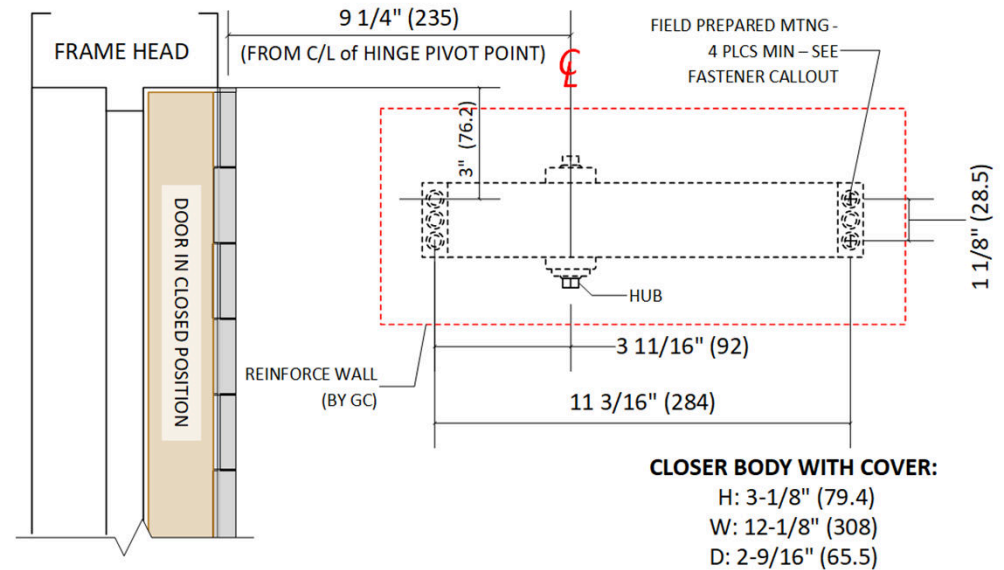


This template supports standard Syntégra EMA/EM Hinges, and **4-½" butt hinges only!** Contact factory for other hinge types.

### FASTENERS:

CLOSER BODY: # 14 X 3" ALL PURPOSE SCREW – 4 PIECES  
ARM BRACKET - # 14 X 1-¼" ALL PURPOSE SCREW – 2 PIECES

### WALL REINFORCEMENT:

A minimum of 14ga thick steel, or ¾" wood, and secured to wall studs. The reinforcement may be flush with the wall surface or on the interior behind the drywall layer(s). For masonry construction, the reinforcement may be secured to the wall with four screws (at corners) to metal anchors.

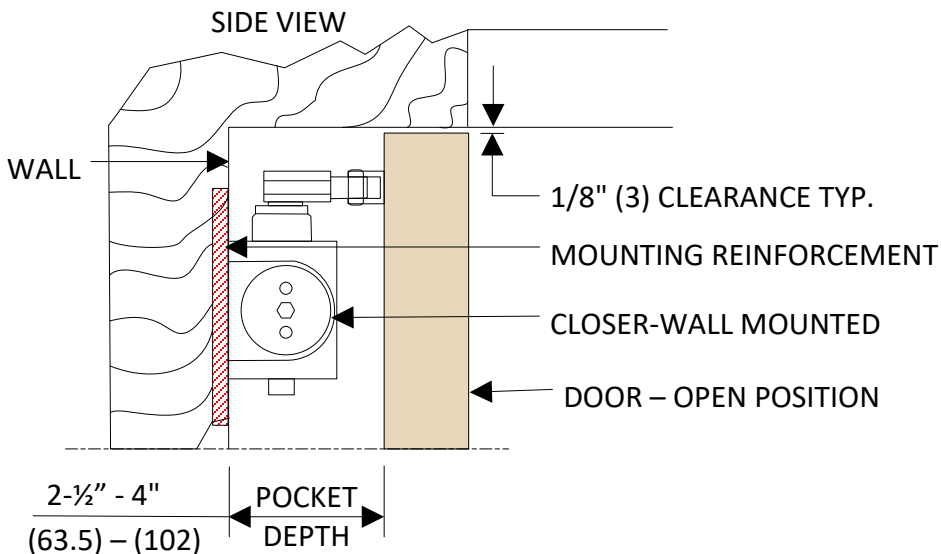

THIS DRAWING REMAINS THE PROPERTY OF  
SYNTEGRA LLC.  
IT MUST BE KEPT CONFIDENTIAL AND EMPLOYED  
ONLY FOR THE PURPOSE FOR WHICH IT WAS ISSUED.  
UNAUTHORIZED USE, REPRODUCTION, DISCLOSURE OR  
RETENTION IS EXPRESSLY PROHIBITED. ALL PROPRIETARY  
AND MANUFACTURING RIGHTS RESERVED.



DESIGN HISTORY	DATE
DRAWN BY Alan Uyeda	01/12/2023
PROJECT ENGINEER	

CLPKT Pocket Closer 90° Applications			
SIZE <b>B</b>	DWG. NO. <b>T3009</b>	REV <b>E</b>	
SCALE	NTS	DO NOT SCALE DRAWING	SHEET 1 OF 1