

# Vision Lite – Integral


The Syntégra Integral Vision Lites present a frameless look from the secure side of the door and offers a minimized interior frame that blends in with the door once painted. The Integral Vision Lite provides the right balance of strength, tamper resistance, and aesthetics.

## Standard Features


- Material: 16ga Cold Rolled Steel
- Removable stop punched and countersunk
- Finish: Grey Primer
- Glazing: Should be 1/4", 3/16", or 5/16" fire and/or safety rated with testing agency classification markings

## Optional Features

- Security Fasteners
- #304 Stainless Steel (#4 finish)

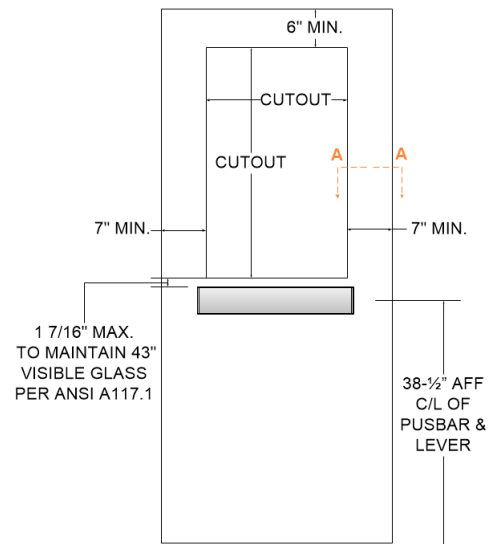

Door Cutout 1-1/4" larger than visible glass  
Glass Size 1" larger than visible glass

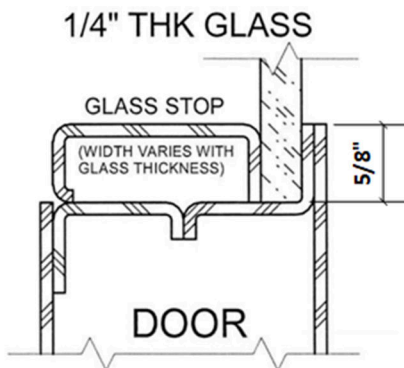

A-A

Standard Lite

# Vision Lite – Integral

## Size and Glazing limitations

RATING (MINUTES)	MAX WIDTH	MAX HEIGHT	MAX AREA PER LITE	MAX AREA PER LEAF	MAX WIDTH	MAX HEIGHT	MAX AREA PER LITE	MAX AREA PER LEAF	MAX WIDTH	MAX HEIGHT	MAX AREA PER LITE	MAX AREA PER LEAF
20	36	54	1296	2400	34	84	2856	2856	36	89	3204	3204
45	36	54	1296	2400	34	84	2856	2856	36	89	3204	3204
60	12	33	100	100	12	46	1716	1716	36	89	3204	3204
90	12	33	100	100	12	46	1716	1716	36	56-1/2	2034	2034
180	-	-	-	-	-	-	-	-	12	33	100	100
60 TR	12	33	100	100	12	33	100	100	12	33	100	100
90 TR	12	33	100	100	12	33	100	100	12	33	100	100
180 TR	-	-	-	-	-	-	-	-	-	-	-	-

WIRE GLASS

PILKINGTON GLASS  
 w/ PEMKO FIREGLAZE  
 (OR EQUAL)

FIRELITE  
 (OR EQUAL)